

CP-X264



ULTRA PORTABLE BUSINESS PROJECTOR



The CP-X264 is the ultimate portable projector for the mobile business consumer. Combining stunning features with powerful performance in a lightweight and compact design, the CP-X264 delivers whichever way you look at it.

- 2500 ANSI Lumens (Normal Mode)
2000 ANSI Lumens (Eco Mode)
- XGA Resolution
- High Connectivity
- Lightweight and portable
- Short throw lens - 60" @ 1.8 m
- MyScreen Memory Image Store
- Whiteboard/Blackboard/Greenboard Modes



HITACHI
Inspire the Next

CP-X264

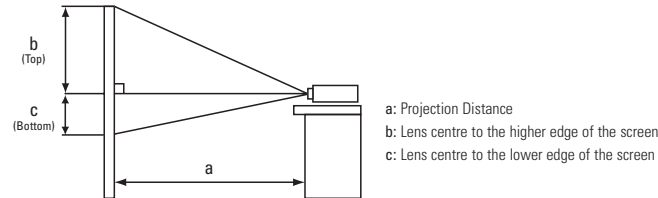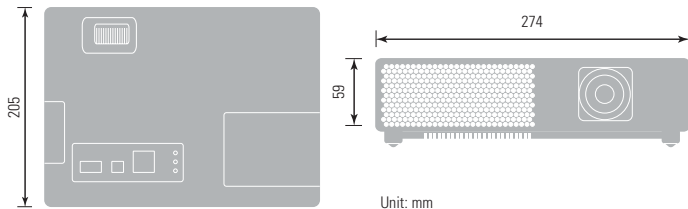

Screen Size (Diagonal)	Projection Distance (a)		Screen Height (cm)	
	min. (m)	max. (m)	b (top)	c (bottom)
30"	0.9	1.1	39.0	7.0
40"	1.2	1.4	52.0	9.0
50"	1.5	1.8	65.0	11.0
60"	1.8	2.2	78.0	13.0
70"	2.1	2.5	91.0	15.0
80"	2.4	2.9	105.0	17.0
90"	2.7	3.3	118.0	20.0
100"	3.0	3.6	131.0	22.0
120"	3.6	4.4	157.0	26.0
150"	4.5	5.4	196.0	33.0
200"	6.1	7.3	261.0	44.0
250"	7.6	9.1	327.0	54.0
300"	9.1	10.9	329.0	65.0

CP-X264 Technical Specifications

OPTICAL

LCD Panel		0.63" P-Si TFT x 3
Resolution		XGA
Brightness	Normal Mode	2500 ANSI Lumens
	Eco Mode	2000 ANSI Lumens
Contrast Ratio		500:1
Lens		Manual x 1.2 zoom
Lamp		UHP 190W
Focus Distance		0.9-9.1 (WIDE), 1.1-10.9 (TELE)
Distance to Width Ratio (:1)		1.5 (WIDE), 1.8 (TELE)
Diagonal Display Size		30"-300" (1.8m@60")

COMPATIBILITY

Computer Compatibility	IBM Compatible VGA, SVGA, XGA, SXGA/SXGA+, UXGA Compressed, MAC 16" (Pixelworks chip)
Video Compatibility	NTSC/PAL/SECAM/PAL-M,N/NTSC4.43 SDTV: 525i(480i), 525p(480p), 625i(576i) HDTV: 750p (720p@60Hz), 1125i(1080i@50/60Hz)
Plug & Play	DDC2B
Frequency Range	FV 56-120Hz, FH 31.5-106KHz

FEATURES

Keystone Correction	6:1 upward shift, fixed
Digital Keystone	Auto V keystone
Speakers	1 x 1W
Other:	Variable Colour (R, G, B individual), MENU: 17 Language (English, French, German, Spanish, Italian, Norwegian, Dutch, Japanese, Portuguese, Simplified Chinese, Korean, Traditional Chinese, Swedish, Russian, Finnish, Polish, Turkish), Freeze Function, Magnifying, Digital gamma correction, My Memory, PIN Lock system, Transition detector, MyScreen, Easy Operation: Direct Off, Quick ON, Blackboard mode, Whiteboard mode, Input source naming

CONNECTIONS

Computer Input	2 x 15-pin Mini D-sub
Video Input	1 x Composite 1 x S-Video Jack 1 x Component (shared with D-sub 1)
Audio Input	2 x Stereo Mini Jack
Audio Output	1 x Stereo Mini Jack
Control & Mouse	1 x USB type B for mouse control

POWER

Power Supply	100-120V/220-240V
Power Consumption	310W

PHYSICAL

Dimensions (W x H x D)	274 x 59 x 205mm (excluding feet and extrusions)
Weight	1.8Kg (3.8lbs)
Noise Level	39dB Normal Mode/33dB Eco Mode

MISCELLANEOUS

Lamp indicator light, Power light, Ceiling Mount image, Rear Projection Image

CERTIFICATION

UL 60950-1/ cUL, FCC Part15 subpart B class B. CE approval, EN61000-3-2, EN61000-3-3, EN55022, EN55024, EN60950-1, Low voltage directive, WEEE. Other AS/NZS CISPR22 class B

ACCESSORIES SUPPLIED

RGB Cable, Remote Control, Batteries, Power Cord, Safety Instruction, Quick Guide, 14 Languages User Manual (English, French, German, Spanish, Italian, Norwegian, Dutch, Portuguese, Simplified Chinese, Korean, Swedish, Russian, Finnish, Polish), Soft Case

OPTIONAL ACCESSORIES

Replacement Lamp	DT00821
------------------	---------

