

MULTIMEDIA DATA/VIDEO PROJECTORS

Changes for the Better

Our New Standard... Their New Benchmark...
Engineered for Richer Colors and Long-Life Performance.



NEW

Mobile XGA

XD500U

Functional Performance at its best

- Outstanding brightness-2200 ANSI Lumens
2000:1 rich contrast ratio
Super low noise operation-26 dBA (low mode)
Center lens design for easy symmetrical installation
Splash screen and wall screen support
Separate audio and video inputs for computers and video sources
Closed caption support

Lower Cost of Ownership for a Better Investment

- Long-life lamp-3000 hours (low mode)
Top-access lamp cover for easy lamp replacement
Filter-free design
Enhanced security features with an anti-theft security bar and password protection
Time-saving instant shut down feature

BrilliantColor™ Technology and Mitsubishi's Engineering Yields Superior Color Performance

BrilliantColor™ Technology is Texas Instruments' latest innovation for richer color and better imaging for vibrant displays. At Mitsubishi, we developed a 6-segment color wheel that includes RGBWYC. Apart from the typical red, green, blue and white, we added yellow and cyan segments to display a wider color spectrum.

Together with selective lamp powered modulation techniques, the XD500U with BrilliantColor™ Technology acts intelligently to boost colors to improve the intensity and vibrant of an entire display. For instance, when projecting an already-bright screen image, the lamp is programmed to provide brighter, more vivid colors.



* BrilliantColor is a trademark of Texas Instruments.



Top Access Lamp Cover



Splash screen

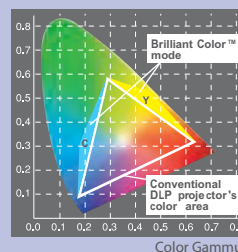


NEW



Mobile XGA XD500U



Input and Output Terminals

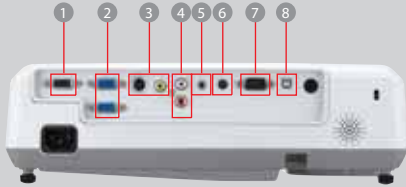


- 1 PC / Component Video output
- 2 PC / Component Video input (mini D-sub 15pin)
- 3 S-Video / RCA
- 4 Audio input [RCA jack (L/R)]
- 5 Audio input (stereo mini jack)
- 6 Audio output
- 7 Serial RS-232C
- 8 USB terminal for Page Up/Down

Specification

Model	XD500U
Display technology	0.55"1-Chip DMD, 12 degree LVDS, DDP 2230
Resolution	1024 x 768 (786,432 pixels)
Brightness	2200lm
Contrast	2000:1 (on/off)
Picture Size	40~300" Diagonal Screen
Throw Ratio	1.8 ~ 2.1
Source lamp	150W (Shut off time 3000 hours) with Low Mode 200W (Shut off time 2000 hours) with Standard Mode
Computer compatibility	640 x 480 ~ 1280 x 1024 (Compressed) True: 1024 x 768, Sync on green available
Video compatibility	NTSC / NTSC 4.43 / PAL (including PAL-M, N) / SECAM/PAL-60, Component Video : 480i/p (525i/p), 576i/p (625i/p), 720p (750p), 1080i (1125i 60Hz), 1080i (1125i 50Hz)
Input terminals	RGB : mini D-sub15pin x 2, Video : RCA x 1 + S-video x 1 Audio : stereo mini jack (3.5mm) x 1
Output terminals	RGB : mini D-sub15pin x 1, Audio : stereo mini jack (3.5mm) x 1
Communication terminals	RS -232C (D-sub 9pin) x 1, USB terminal for Page Up/Down x 1
Audio speaker	2W mono
Fan noise	26dBA (Low Mode)
Dimensions(WxHxD)	332 x 102 x 250 mm / 13.1 x 4.0 x 9.8 inch (excluding height adjustment)
Weight	2.9kg / 6.5lbs
Power supply	AC 100-240V, 50/60Hz
Optional lamp	VLT-XD500LP

*All brand names and product names are trademarks, registered trademarks or trade names of their respective holders.


Dimensions

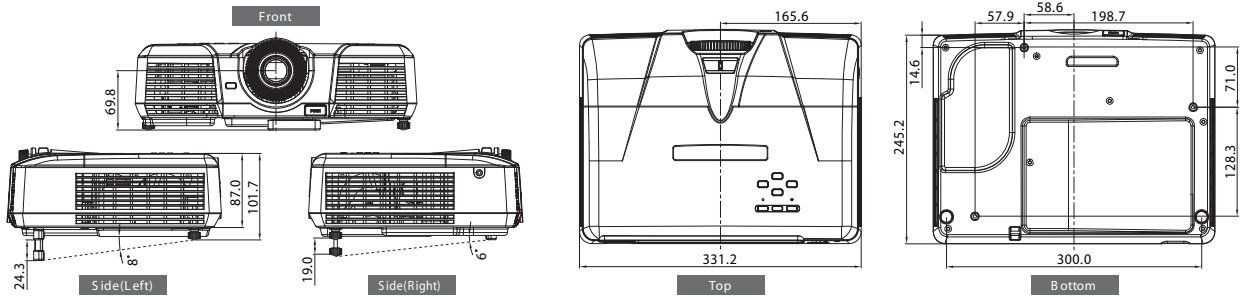

Unit: mm

Screen size and projection distance

As seen from the side

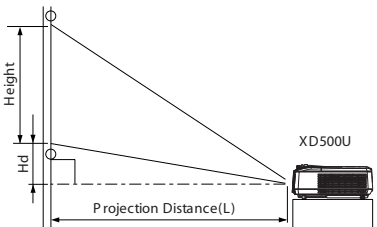


Screen size chart (XD500U)

Diagonal size	Screen (4:3 aspect ratio)				Distance from screen (L)				Height projected image (Hd)		
	Width (W)		Height (H)		Shortest		Longest		inch	cm	
40	102	32	81	24	61	55	14	68	17	1.8	5
60	152	48	122	36	91	84	2.1	103	2.6	2.7	7
80	203	64	163	48	122	112	2.8	137	3.5	3.6	9
100	254	80	203	60	152	141	3.6	172	4.4	4.5	11
150	381	120	305	90	229	212	5.4	259	6.6	6.8	17
200	508	160	406	120	305	283	7.2	345	8.8	9.0	23
250	635	200	508	150	381	354	9.0	432	11.0	11.3	29
300	762	240	610	180	457	425	10.8	-	-	13.5	34

The above numbers are approximate, and may be slightly different from the actual measurements.

MITSUBISHI DIGITAL ELECTRONICS
AMERICA, INC.

Presentation Products Division
Phone: 888.307.0349
Email: ppdinfo@mdea.com
www.mitsubishi-presentations.com

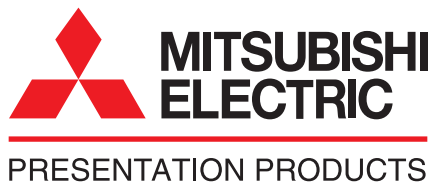

MITSUBISHI ELECTRIC SALES
CANADA INC.

Information Technologies Group
Phone: 905.475.7728
www.mitsubishielectric.ca



Ultra-short Throw XGA
XD500U-ST

Functional Performance at its Best

▶ Ultra-Short Throw Projection

The issue of presenting in environments with limited projection space can be eliminated with the new XD500U-ST. This native XGA projector is equipped with an ultra powerful short-throw lens that can project an amazing 60-inch diagonal image from a distance of just 33 inches (83cm) from the screen. With such an amazing short projection distance, concern of casting a presenter's shadow in front of the screen is now eliminated.





BrilliantColor™ Technology and Mitsubishi Electric's Engineering Yields Superior Color Performance

BrilliantColor™ Technology is Texas Instruments latest innovation in producing amazing, rich, and vibrant colors. At Mitsubishi Electric, we developed a 6-segment color wheel that includes the colors of R,G,B,W,Y,C. Apart from the typical red, green, blue and white, we added yellow and cyan segments to display a wider color spectrum. In addition, we coded our color algorithms to emphasize brightness or color modes, designed to match the environment where the XD500U-ST is used.

Together with selective lamp powered modulation techniques, the XD500U-ST with BrilliantColor™ technology acts intelligently to boost colors to improve the intensity and vibrancy of an entire display. For instance, when projecting an already-bright screen image, the lamp is programmed to provide brighter, more vivid colors. In contrast, if the image shows genuine color reproduction, the algorithm delivers just the right colors with the appropriate radiance for maximum visual impact.

*BrilliantColor is a trademark of Texas Instruments.

Projected Image comparison (with 60-inch screen)

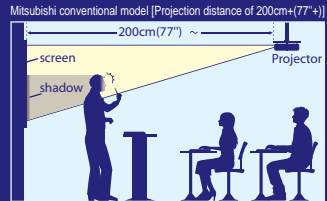
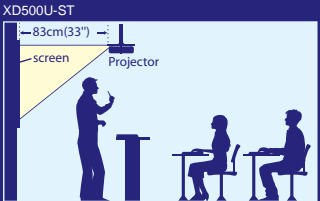
Mitsubishi conventional model [Projection distance of 200cm(77'+)]	XD500U-ST
	
Due to extended longer distance, the instructor is forced to stand directly between the projector and the screen. When facing the students, the projector light enters the instructor's field of vision. This can blind the instructor, whose shadow may also be cast over the screen.	With the projector installed close to the screen, the projector light does not get in the instructor's eyes even when directly facing the students. This proximity also keeps the instructor's shadow off the presentation contents.

- ▶ 2000 ANSI lumens
- ▶ 2500:1 Contrast ratio
- ▶ Closed caption for the hearing impaired
- ▶ Optional Whiteboard and Blackboard modes
- ▶ Center lens design for easy symmetrical installations
- ▶ Splash screen and wall screen support
- ▶ Audio and video inputs for computer and video sources
- ▶ Time saving shut down feature



Easy Maintenance & Security Features

- ▶ Top-access lamp cover for easy lamp replacement
- ▶ Filter-free design
- ▶ Enhanced security features with reinforced anti-theft security bar and password protection






Ultra-Short Throw XGA XD500U-ST



Input and Output Terminals

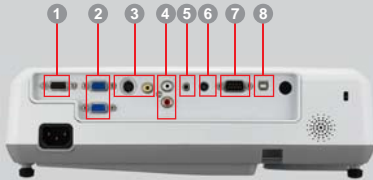


- 1 PC / Component Video output
- 2 PC / Component Video input (mini D-sub 15 pin)
- 3 S-Video / RCA
- 4 Audio input [RCA jack (L/R)]
- 5 Audio input (stereo mini jack)
- 6 Audio output
- 7 Serial RS-232C
- 8 USB terminal for Page Up/Down

Specifications

Model	XD500U-ST
Display technology	0.55"1-Chip DMD, 12 deg. LVDS, DD2230
Resolution	1024 x 768 (total 786,432 pixels)
Brightness	2000lm
Contrast ratio	2500:1 (on-off)
Projection lens	f=7.7mm, F=2.8
Offset axis	14.3 : -1
Throw ratio	0.7"
Picture size	40" ~ 300"
Source lamp	230W (Shut Off Time 3000Hrs) with Low Mode, 280W (shut Off Time 2000Hrs) with Standard Mode
Computer compatibility	640 x 480 ~ 1280 x 1024, True: 1024 x 768, Sync on green available
Video compatibility	NTSC / NTSC4.43 / PAL (including PAL-M, N) / SECAM / PAL-60 Component Video: 480i/p (525i/p), 576i/p (625i/p), 720p (750p), 1080i (1125i 60Hz), 1080i (1125i 50Hz)
Input terminals	RGB: mini D-sub15pin x 2, Video: RCA x 1 + S-video x 1 Audio : stereo mini jack (φ3.5mm) x 1, RCA jack (L/R) x 1
Output terminals	RGB: mini D-sub15pin x 1, Audio : stereo mini jack (φ3.5mm) x 1
Communication terminals	RS-232C (D-sub 9pin) x 1, USB terminal for Page Up/Down x 1
Audio speaker	2W mono
Dimensions (W x H x D)	332 x 102 x 250 mm / 13.1 x 4.0 x 9.8 inch (excluding height adjustment)
Weight	3.3kg / 7.3lbs
Power supply	AC100-240V, 50/60Hz
Optional lamp	VLT-XD520LP
Warranty	3-Years Parts/Labor, 3-Years Express Replacement Assistance, 1-Year or 500 hours lamp warranty (whichever comes first)
Accessories	Ceiling Mount (PROJ-UCM-PRO2 - Universal Ceiling Mount), Hard Shell Rolling Case (DKT1-ATAC), Soft Carrying Case (XL1-SSCC), Soft Rolling Case (DKT1-SRCC)


* All brand names and product names are trademarks, registered trademarks or trade names of their respective holders.

Dimensions

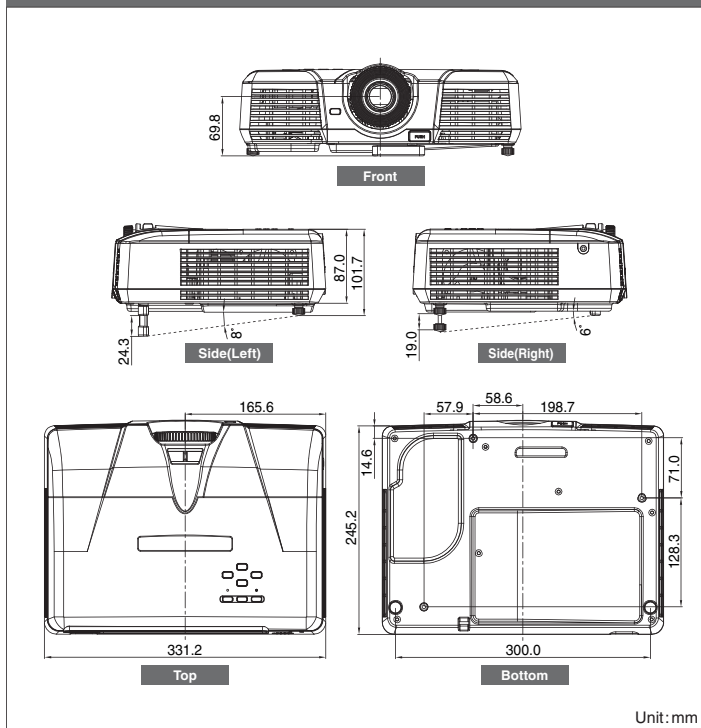

Screen size and Projection distance

As seen from the side

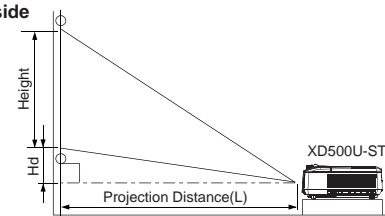

Screen size chart

Screen (4:3 aspect ratio)						Distance from screen (L)		Height projected image (Hd)	
Diagonal size		Width (W)		Height (H)		Distance from screen (L)		Height projected image (Hd)	
inch	cm	inch	cm	inch	cm	inch	cm	inch	cm
40	102	32	81	24	61	22	55	1.8	5
60	152	48	122	36	91	33	83	2.7	7
80	203	64	163	48	122	44	112	3.6	9
100	254	80	203	60	152	55	140	4.5	11
150	381	120	305	90	229	83	212	6.8	17
200	508	160	406	120	305	111	283	9.0	23
250	635	200	508	150	381	139	354	11.3	29
300	762	240	610	180	457	167	425	13.5	34

Screen(16:9 aspect ratio)						Distance from screen (L)		Height projected image (Hd)	
Diagonal size		Width (W)		Height (H)		Distance from screen (L)		Height projected image (Hd)	
inch	cm	inch	cm	inch	cm	inch	cm	inch	cm
40	102	35	89	20	50	23	60	5.2	13
60	152	52	133	29	75	36	91	7.9	20
80	203	70	177	39	100	48	122	10.5	27
100	254	87	221	49	125	60	153	13.1	33
150	381	131	332	74	187	91	230	19.6	50
200	508	174	443	98	249	121	308	26.2	66
250	635	218	553	123	311	152	386	32.7	83
300	762	261	664	147	374	182	463	39.3	100

The above numbers are approximate, and may be slightly different from the actual measurements

**MITSUBISHI DIGITAL ELECTRONICS
AMERICA, INC.**

Presentation Products Division

Phone: 888.307.0349

Email: ppdinfo@mdea.com

www.mitsubishi-presentations.com



PRESENTATION PRODUCTS

**MITSUBISHI ELECTRIC SALES
CANADA, INC.**

Information Technologies Group

Phone: 905.475.7728

www.mitsubishielectric.ca